









HelgeNyberg

HELGE NYBERG AB HAS THE SOLUTIONS TO YOUR NEEDS

Although all our customers have the same basic need for cost-effective, ergonomic material handling, their requirements may differ on crucial points and key details. Also, different industries often have different laws and regulations for products, certifications or other industry-specific requirements.

For this reason, we have specialised in a number of areas on the basis of over 60 years' collective experience and knowledge of our customers' needs This allows us to offer the optimum solutions, the best service and the most secure collaboration.



INDUSTRY & MANUFACTURING Helge Nyberg operates in both light and heavy industries. We have industrial solutions for the entire material flow.



E-COMMERCE & ORDER PICKING

With our long history and our location in a geographic area with many mail order, logistics and warehousing businesses, we have unique know-how and experience in order picking and third party logistics.



HEALTH & MEDICAL CARE

All industries have different requirements and specifications regarding materials and professional equipment. The strictly regulated health care sector has certain specific requirements. We can meet those requirements.



AUTOMOTIVE INDUSTRY

The automotive industry has seen perhaps the most advanced developments in smart logistics. Helge Nyberg's solutions are part of these developments.



SERVICE & SUPPORT

Our truck and trolley solutions are not only ideal for transporting baggage or materials, for instance at airports and trade fairs. They are just as frequently used as wheeled service points by technicians and installers, for example in factories.



LEAN SOLUTIONS

As specialists, we can help you develop the most resource-efficient solutions to your material handling needs – the right material, in the right place at the right time.

A SPECIALIST PROVIDING SOLUTIONS FOR MANY SEGMENTS


SERIES 750



STRONGER IN EVERY WAY

Suitable for order picking in e-commerce and for long haul heavy goods transport. The load carriers in our 750 series are stronger in all respects, due to their build and design. Now you can load 750 kg onto each load carrier and use every millimetre of shelf space. The shelves are fixed with screws, making it simple to reconfigure the trolley as needed. Reinforced wheels and wheel brackets make towing easier. The wide range of trolley types and shelf sizes ensures flexibility and makes it easy to adapt the trolley to the job at hand.

ADAPTED TO YOUR NEEDS

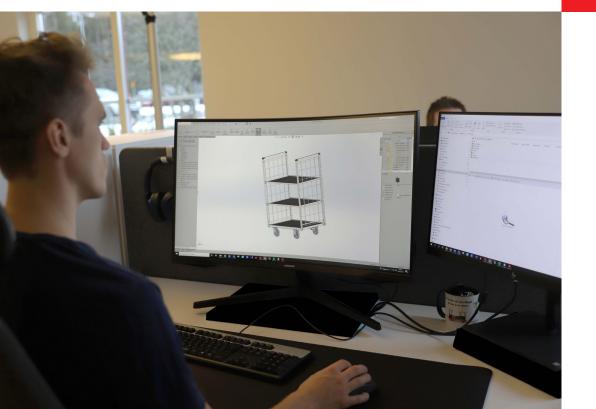

CUSTOMISED SOLUTIONS

For Helge Nyberg, it's not a problem to provide customised solutions. We see it as a challenge that develops our own as well as the user's daily work. Thanks to our R&D department's experience and solid know-how, we have gained a reputation for providing value-adding solutions tailored to customers' requirements.

Do you have specific requests for your company? We'll solve it in collaboration with you.

TROLLEYS FOR TOWING TRUCKS

All our trolleys in 750 series have a load capacity of 750 kg. With their excellent ergonomics and high quality, they help raise profitability in companies that handle goods in-house. The wide range of trolley types and shelf sizes ensures flexibility and makes it easy to adapt the trolley to the job at hand. The trolleys can be tailored to suit most needs with the help of smart accessories. The shelves have raised edges, grooved surfaces and end grids to keep the cargo firmly in place. The trolleys have a maximum speed of 12 km/h.

ADAPTED TO YOUR NEEDS

Our shelf trolleys are designed for use with towing trucks to transport larger quantities of goods in narrow spaces. The trolleys' ends and shelves are reinforced to withstand loads up to 750 kg. The shelves are recessed in the frame profile and have a grooved surface to keep the products in place. The trolley is designed so that every millimetre of shelf space can be utilised. The trolleys in our 750 series are easy to reconfigure and adapt to the job at hand.

Max. load 750 kg. Lower shelf has a max. load of 750 kg. Upper shelves have a max. load of 200 kg. Two fixed wheels and two swivel wheels, all with grey elastic rubber tyres measuring 200x50 mm, ball bearing hubs.



| Quick | count | ing v | vith re | eart | wo | har |
|-------|-------|-------|---------|------|----|-----|
| | | | | | | |

| ltem no. | Shelves | Shelf dim. | Length | Width | Height |
|----------|---------|------------|--------|-------|--------|
| 15752682 | 3 | 1,250x600 | 1,340 | 670 | 1,990 |
| 15752882 | 3 | 1,250x800 | 1,340 | 870 | 1,990 |
| 15754682 | 3 | 1,450x600 | 1,540 | 670 | 1,990 |
| 15754882 | 3 | 1,450x800 | 1,540 | 870 | 1,990 |
| 15756682 | 3 | 1,650x600 | 1,740 | 670 | 1,990 |
| 15756882 | 3 | 1,650x800 | 1,740 | 870 | 1,990 |

| Quick cou | pling with front tow bar | |
|-----------|--------------------------|--------|
| ltom no | Chalvas Chalfdim | Longth |

| ltem no. | Shelves | Shelf dim. | Length | Width | Height |
|----------|---------|------------|--------|-------|--------|
| 15752681 | 3 | 1,250хбоо | 1,340 | 670 | 1,990 |
| 15752881 | 3 | 1,250x800 | 1,340 | 870 | 1,990 |
| 15754681 | 3 | 1,450x600 | 1,540 | 670 | 1,990 |
| 15754881 | 3 | 1,450x800 | 1,540 | 870 | 1,990 |
| 15756681 | 3 | 1,650x600 | 1,740 | 670 | 1,990 |
| 15756881 | 3 | 1,650x800 | 1,740 | 870 | 1,990 |
| | | | | | |



| ltem no. | Shelves | Shelf dim. | Length | Width | Height |
|----------|---------|------------|--------|-------|--------|
| | | | 0 | | |
| 15752683 | 3 | 1,250x600 | 1,409 | 670 | 1,990 |
| 15752883 | 3 | 1,250x800 | 1,409 | 870 | 1,990 |
| 15754683 | 3 | 1,450x600 | 1,609 | 670 | 1,990 |
| 15754883 | 3 | 1,450x800 | 1,609 | 870 | 1,990 |
| 15756683 | 3 | 1,650x600 | 1,809 | 670 | 1,990 |
| 15756883 | 3 | 1,650x800 | 1,809 | 870 | 1,990 |

| ltem no. | Shelves | Shelf dim. | Length | Width | Height |
|----------|---------|------------|--------|-------|--------|
| 15752680 | 3 | 1,250x600 | 1,409 | 670 | 1,990 |
| 15752880 | 3 | 1,250x800 | 1,409 | 870 | 1,990 |
| 15754680 | 3 | 1,450x600 | 1,609 | 670 | 1,990 |
| 15754880 | 3 | 1,450x800 | 1,609 | 870 | 1,990 |
| 15756680 | 3 | 1,650x600 | 1,809 | 670 | 1,990 |
| 15756880 | 3 | 1,650x800 | 1,809 | 870 | 1,990 |

Tow bar coupling with rear tow bar

TROLLEYS FOR TOWING TRUCKS

QUICK

With the Quick towing device, the tow bar is fitted facing forwards or backwards and connects from underneath. The device is easy to release with a simple foot movement, making Quick one of our most ergonomic towing devices.

10

ACCESSORIES – TROLLEYS FOR TOWING TRUCKS



EXTRA SHELVES

| ltem no. | Shelf dim. |
|----------|------------|
| 12752526 | 1,250x600 |
| 12752528 | 1,250x800 |
| 12752546 | 1,450x600 |
| 12752548 | 1,450x800 |
| 12752566 | 1,650x600 |
| 12752568 | 1,650x800 |
| | |

Extra shelf in a choice of three lengths. It is easy to assemble and adjust the height of the shelves. The shelves have a grooved surface and a raised edge.



SHELF DIVIDER

| Item no. | Width |
|----------------------------------------|-------|
| 10750004 | 600 |
| 10750007 | 800 |
| Compatible with chassis 10750009 | 600 |
| 10750010 | 800 |
| | |

Easy to reposition or remove. Available for all truck sizes.



TRUCK FORK GUIDE

| Item no. | Width |
|----------|-------|
| 12750011 | 600 |
| 12750011 | 800 |
| | |
| | |
| | |

For handling trolleys from the side. Please specify distance between the truck forks and the forks' height at the highest point when ordering.

EFFICIENCY





SUSTAINABILITY

LOGISTICS & ERGONOMICS

An integrated truck and trailer system and trolleys with adjustable shelves are examples of solutions that improve worker ergonomics. These solutions also make order picking more efficient. Quite simply, the right equipment makes the job faster. Our trucks can easily be adapted both to the job at hand and to individual physical requirements. This makes employees' work easier and improves their physical and mental health.





ERGONOMICS

KEEP YOUR STAFF HEALTHY AND YOUR COSTS DOWN



1. PRIORITY TO ERGONOMICS

Ergonomic solutions – such as trucks with a low entry threshold and a non-vibrating platform, or trailers with a ladder and adjustable shelves and handles – offer economic benefits by reducing the costs of sick leave and rehabilitation.

2. TIME IS MONEY

Walk less, save costs. Our trains of trolleys with a pick-train connection reduce the walking distance when picking orders. This improves cost-effectiveness by saving time. Here are more examples of how to rationalise your order picking to save time and money.

3. SMART PICKING SOLUTIONS

Do you have a growing company? Review your warehouse logistics. When your business grows and material handling increases, you don't necessarily need to expand your warehouse. Helge Nyberg has smart, modern, cost-effective picking and transport solutions that can be tailored to suit your warehouse. Efficiency is key in keeping staff costs down. We help you rationalise your warehouse logistics.

TROLLEYS FOR PICKING TRUCKS

All our trolleys in 750 series have a load capacity of 750 kg. With their good ergonomics and high quality, they help raise profitability in companies where light goods are handled in-house. The wide range of trolley types and shelf sizes ensures flexibility and makes it easy to adapt the trolley to the job at hand. The trolleys can be tailored to suit most needs with the help of smart accessories. The shelves have raised edges, grooved surfaces and end grids to keep the cargo firmly in place. The trolleys have a maximum speed of 12 km/h.

TROLLEYS FOR PICKING TRUCKS 709

STEP TROLLEY

Trolley with steps for picking and replenishment in warehouse and production facilities. The combined solution provides an efficient mobile workplace, e.g. for order picking up to a height of 3 metres. The uprights are held together by a top element. All shelves are recessed in the frame profile. Fixed distance between shelves, 512 mm for 3-shelf trolley. The 4-shelf trolley has a distance of 362 mm between the bottom shelf and first shelf and 318 mm between the other shelves. Max. load 750 kg. Max. load, shelves 200 kg. Max. load, product resting shelf 40 kg. Two fixed docking wheels with tugs and two swivel wheels, all with grey elastic rubber tyres measuring 200x50 mm, ball bearing hubs. Shelf divider available as optional accessory.

| 3 shelves | | | | | | | |
|-----------|---------|--------------|--------------|-----------|--------|-------|--------|
| ltem no. | Shelves | Bottom shelf | Middle shelf | Top shelf | Length | Width | Height |
| 15752695 | 3 | 1,250x600 | 1,120x600 | 955x6oo | 1,373 | 707 | 2,280 |

| 4 shelves | | | | | | | | |
|-----------|---------|--------------|----------------|----------------|-----------|--------|-------|--------|
| Item no. | Shelves | Bottom shelf | Middle shelf 1 | Middle shelf 2 | Top shelf | Length | Width | Height |
| 15752696 | 4 | 1,250x600 | 1,156x600 | 1,055x600 | 955x6oo | 1,373 | 707 | 2,280 |
| | | | | | | | | |





REDUCE YOUR PICKING TIME

These shelf trolleys are designed for use with picking trucks. The trolleys' ends and shelves are reinforced to withstand loads up to 750 kg. The shelves are recessed in the frame profile and have a grooved surface to keep the products in place. The trolley is designed so that every millimetre of shelf space can be used. It is light and handy for order picking. The docking system makes it quick and easy to change the trolleys. The trolleys in our 750 series are easy to reconfigure and adapt to the job at hand.

Max. load 750 kg. Lower shelf has a max. load of 750 kg. Upper shelves have a max. load of 200 kg. Two fixed docking wheels with tugs and two swivel wheels, all with grey elastic rubber tyres measuring 200x50 mm, ball bearing hubs.

| Docking trolley (A-trolley) | | | | | | | |
|-----------------------------|---------|------------|--------|-------|--------|--|--|
| Item no. | Shelves | Shelf dim. | Length | Width | Height | | |
| 15752690 | 3 | 1,250x600 | 1,361 | 707 | 1,990 | | |
| 15754690 | 3 | 1,450x600 | 1,561 | 707 | 1,990 | | |
| 15756690 | 3 | 1,650x600 | 1,761 | 707 | 1,990 | | |



TROLLEYS FOR PICKING TRUCKS 709



| Ready-prepared | for pick-train connection | (B-trolley) |
|----------------|---------------------------|-------------|
|----------------|---------------------------|-------------|

| ltem no. | Shelves | Shelf dim. | Length | Width | Height |
|----------|---------|------------|--------|-------|--------|
| 15752685 | 3 | 1,250x600 | 1,340 | 670 | 1,990 |
| 15754685 | 3 | 1,450x600 | 1,540 | 670 | 1,990 |
| 15756685 | 3 | 1,650x600 | 1,740 | 670 | 1,990 |

ACCESSORIES – TROLLEYS FOR PICKING TRUCKS 709



PICK-TRAIN

| Item no. | Width | |
|----------|-------|--|
| 12753406 | 600 | |
| | | |
| | | |
| | | |
| | | |
| | | |
| ' | | |

This solution has ergonomic benefits and also shortens picking times by reducing the picker's walking distance. Up to two trolleys can be used in the train.





EXTRA SHELVES

 Item no.
 Shelf dim.

 12752526
 1,250x600

 12752546
 1,450x600

 12752566
 1,650x600

Extra shelf in a choice of three lengths. It is easy to assemble and adjust the height of the shelves. The shelves have a grooved surface and a raised edge.



SHELF DIVIDER

| Item no. | Width |
|----------------------------------------|-------|
| 10750004 | 600 |
| Compatible with chassis 10750009 | 600 |

Easy to reposition or remove. Available for all truck sizes and models.

PICK-TRAIN



Pick-train is designed to shorten the distance between the trolleys in a train. This solution has ergonomic benefits and also shortens picking times by reducing the picker's walking distance. Up to two trolleys can be used in the train.

Pick-train can only be used with trolleys from Helge Nyberg AB and in combination with Helge Nyberg trucks. When pick-train is used in a train of trolleys, the second trolley in the train must not be dockable.





SHORTER PICKING TIMES

TROLLEYS FOR PICKING TRUCKS 710

STEP TROLLEY

Trolley with steps for picking and replenishment in warehouse and production facilities. The combined solution provides an efficient mobile workplace, e.g. for order picking up to a height of 3 metres. The uprights are held together by a top element. All shelves are recessed in the frame profile. Fixed distance between shelves, 512 mm for 3-shelf trolley. The 4-shelf trolley has a distance of 362 mm between the bottom shelf and first shelf and 318 mm between the other shelves. Max. load 750 kg. Max. load, shelves 200 kg. Max. load, product resting shelf 40 kg. Two fixed docking wheels with tugs and two swivel wheels, all with grey elastic rubber tyres measuring 200x50 mm, ball bearing hubs. Shelf divider available as optional accessory.

| 3 shelves | | | | | | | |
|-----------|---------|--------------|--------------|-----------|--------|-------|--------|
| Item no. | Shelves | Bottom shelf | Middle shelf | Top shelf | Length | Width | Height |
| 15752895 | 3 | 1,250x800 | 1,113x800 | 955x800 | 1,373 | 907 | 2,280 |

| 4 shelves | | | | | | | | |
|-----------|---------|--------------|----------------|----------------|-----------|--------|-------|--------|
| Item no. | Shelves | Bottom shelf | Middle shelf 1 | Middle shelf 2 | Top shelf | Length | Width | Height |
| 15752896 | 4 | 1,250x800 | 1,156x800 | 1,055x800 | 955x8oo | 1373 | 907 | 2,280 |
| | | | | | | | | |





EASY TO DRIVE IN NARROW SPACES

These shelf trolleys are designed for use with picking trucks. The trolleys' ends and shelves are reinforced to withstand loads up to 750 kg. The shelves are recessed in the frame profile and have a grooved surface to keep the products in place. The trolley is designed so that every millimetre of shelf space can be used. It is light and handy for order picking. The docking system makes it quick and easy to change the trolleys. The trolleys in our 750 series are easy to reconfigure and adapt to the job at hand.

Max. load 750 kg. Lower shelf has a max. load of 750 kg. Upper shelves have a max. load of 200 kg. Two fixed docking wheels with tugs and two swivel wheels, all with grey elastic rubber tyres measuring 200x50 mm, ball bearing hubs.



| Ready-prepared for pick-train connection (B-trolley) | | | | | |
|------------------------------------------------------|--------------|----------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|
| Shelves | Shelf dim. | Length | Width | Height | |
| 3 | 1,250x800 | 1,340 | 870 | 1,990 | |
| 3 | 1,450x800 | 1,540 | 870 | 1,990 | |
| 3 | 1,650x800 | 1,740 | 870 | 1,990 | |
| | Shelves 3 | Shelves Shelf dim. 3 1,250x800 3 1,450x800 | Shelves Shelf dim. Length 3 1,250x800 1,340 3 1,450x800 1,540 | Shelves Shelf dim. Length Width 3 1,250x800 1,340 870 3 1,450x800 1,540 870 | |

TROLLEYS FOR PICKING TRUCKS 710

| Docking trolle | ey (A-trolley) | | | | |
|----------------|----------------|------------|--------|-------|--------|
| Item no. | Shelves | Shelf dim. | Length | Width | Height |
| 15752890 | 3 | 1,250x800 | 1,361 | 907 | 1,990 |
| 15754890 | 3 | 1,450x800 | 1,561 | 907 | 1,990 |
| 15756890 | 3 | 1,650x800 | 1,761 | 907 | 1,990 |



ACCESSORIES – TROLLEYS FOR PICKING TRUCKS 710



EXTRA SHELVES

| ltem no. | Shelf dim. |
|----------|------------|
| 12752528 | 1,250x800 |
| 12752548 | 1,450x800 |
| 12752568 | 1,650x800 |
| 15 5 1 | , |
| | |
| | |

Extra shelf in a choice of three lengths. It is easy to assemble and adjust the height of the shelves. The shelves have a grooved surface and a raised edge.




SHELF DIVIDER

| Item no. | Width |
|---------------------------------------------|-------|
| 10750007 | 800 |
| Compat- ible with chassis 10750010 | 800 |

Easy to reposition or remove. Available for all truck sizes.




PICK-TRAIN



This solution has ergonomic benefits and also shortens picking times by reducing the picker's walking distance. Up to two trolleys can be used in the train.




TURN RADIUS – PICK-TRAIN

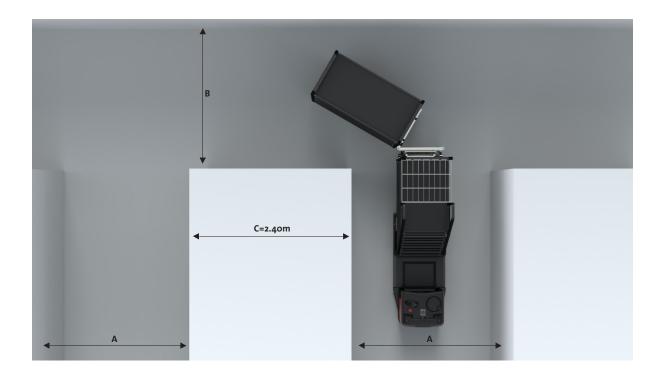

| Number of trolleys | Trolley model | Shelf dim. | A-aisle (mm) | B-aisle (mm) | U-turn (mm) |
|-----------------------|------------------|---------------|-----------------|-----------------|-------------|
| 1 | 15 75 28 85 | 1,250x800 | 2,000 | 1,500 | 2,800 |
| 2 | 15 75 28 85 | 1,250x800 | 2,000 | 1,500 | 3,750 |
| | | | | | |
| 1 | 15 75 48 85 | 1,450x800 | 2,000 | 1,750 | 3,000 |
| 2 | 15 75 48 85 | 1,450x800 | 2,000 | 2,000 | 4,250 |
| | | | | | |
| 1 | 15 75 68 85 | 1,650x800 | 2,000 | 2,000 | 3,200 |
| 2 | 15 75 68 85 | 1,650x800 | 2,000 | 2,500 | 4,500 |


TURN RADIUS – QUICK

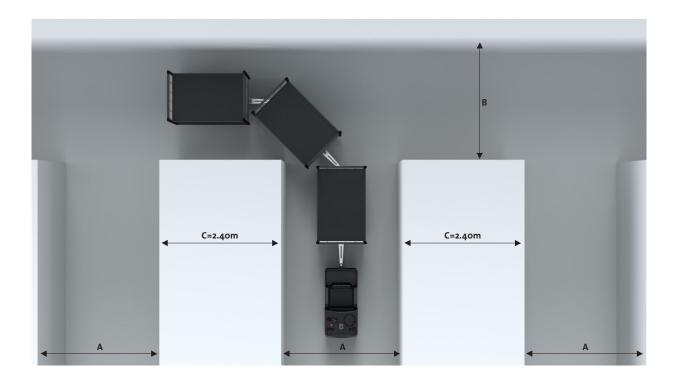

| Number of trolleys | Trolley model | Shelf dim. | A-aisle (mm) | B-aisle (mm) | U-turn (mm) |
|-----------------------|------------------|------------|--------------|-----------------|----------------|
| 1 | 15 75 28 81 | 1,250x800 | 2,000 | 1,500 | 2,700 |
| 2 | 15 75 28 81 | 1,250x800 | 2,000 | 2,000 | 3,600 |
| 3 | 15 75 28 81 | 1,250x800 | 2,000 | 3,000 | 4,000 |
| | | | | | |
| 1 | 15 75 48 81 | 1,450x800 | 2,000 | 2,000 | 2,850 |
| 2 | 15 75 48 81 | 1,450x800 | 2,000 | 2,500 | 4,000 |
| 3 | 15 75 48 81 | 1,450x800 | 2,000 | 3,500 | 4,350 |
| | | | | | |
| 1 | 15 75 68 81 | 1,650x800 | 2,000 | 2,000 | 3,000 |
| 2 | 15 75 68 81 | 1,650x800 | 2,000 | 3,000 | 4,500 |
| 3 | 15 75 68 81 | 1,650x800 | 2,000 | 4,000 | 4,700 |

| Number of trolleys | Trolley model | Shelf dim. | A-aisle (mm) | B-aisle (mm) | U-turn (mm) |
|-----------------------|------------------|------------|-----------------|--------------|----------------|
| 1 | 15 75 28 82 | 1,250x800 | 2,000 | 1,500 | 3,000 |
| 2 | 15 75 28 82 | 1,250x800 | 2,000 | 2,000 | 3,600 |
| 3 | 15 75 28 82 | 1,250x800 | 2,000 | 2,000 | 4,000 |
| | | | | | |
| 1 | 15 75 48 82 | 1,450x800 | 2,000 | 1,500 | 3,250 |
| 2 | 15 75 48 82 | 1,450x800 | 2,000 | 2,000 | 3,800 |
| 3 | 15 75 48 82 | 1,450x800 | 2,000 | 3,000 | 4,250 |
| | | | | | |
| 1 | 15 75 68 82 | 1,650x800 | 2,000 | 1,500 | 3,500 |
| 2 | 15 75 68 82 | 1,650x800 | 2,000 | 2,000 | 4,500 |
| 3 | 15 75 68 82 | 1,650x800 | 2,000 | 3,500 | 5,000 |

TURN RADIUS – TOW BAR

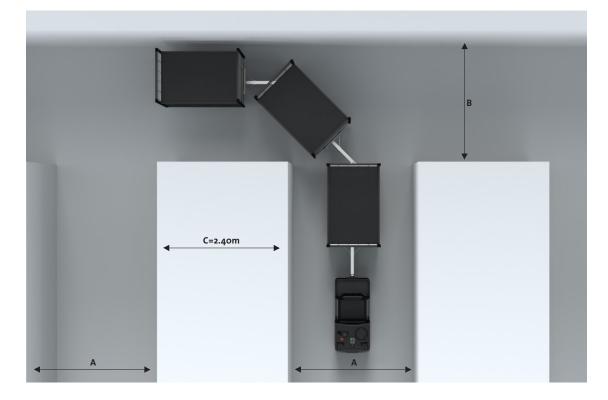

| Number of trolleys | Trolley model | Shelf dim. | A-aisle (mm) | B-aisle (mm) | U-turn (mm) |
|--------------------|------------------|------------|-----------------|-----------------|----------------|
| 1 | 15 75 28 83 | 1,250x800 | 2,000 | 1,500 | 2,700 |
| 2 | 15 75 28 83 | 1,250x800 | 2,000 | 2,000 | 3,600 |
| 3 | 15 75 28 83 | 1,250x800 | 2,000 | 3,000 | 4,000 |
| | | | | | |
| 1 | 15 75 48 83 | 1,450x800 | 2,000 | 2,000 | 2,850 |
| 2 | 15 75 48 83 | 1,450x800 | 2,000 | 3,500 | 4,000 |
| 3 | 15 75 48 83 | 1,450x800 | 2,000 | 3,500 | 4,350 |
| | | | | | |
| 1 | 15 75 68 83 | 1,650x800 | 2,000 | 2,000 | 3,000 |
| 2 | 15 75 68 83 | 1,650x800 | 2,000 | 3,000 | 4,500 |
| 3 | 15 75 68 83 | 1,650x800 | 2,000 | 4,000 | 4,700 |

| Number of trolleys | Trolley model | Shelf dim. | A-aisle (mm) | B-aisle (mm) | U-turn (mm) |
|-----------------------|------------------|---------------|--------------|-----------------|----------------|
| 1 | 15 75 28 80 | 1,250x800 | 2,000 | 1,500 | 3,000 |
| 2 | 15 75 28 80 | 1,250x800 | 2,000 | 2,000 | 3,600 |
| 3 | 15 75 28 80 | 1,250x800 | 2,000 | 2,000 | 4,000 |
| | | | | | |
| 1 | 15 75 48 80 | 1,450x800 | 2,000 | 1,500 | 3,250 |
| 2 | 15 75 48 80 | 1,450x800 | 2,000 | 2,000 | 3,800 |
| 3 | 15 75 48 80 | 1,450x800 | 2,000 | 3,000 | 4,250 |
| | | | | | |
| 1 | 15 75 68 80 | 1,650x800 | 2,000 | 1,500 | 3,500 |
| 2 | 15 75 68 80 | 1,650x800 | 2,000 | 2,000 | 4,500 |
| 3 | 15 75 68 80 | 1,650x800 | 2,000 | 3,500 | 5,000 |



SINCE 1958 Helge Nyberg AB has been developing and manufacturing trolleys and lightweight electric trucks under the name of Ergobjörn for in-house material handling. As specialists, we raise the efficiency and cost-effectiveness of warehousing and logistics in sectors such as industrial manufacturing, health care, airports and e-commerce.



HELGE NYBERG AB

Industrivägen 2 523 90 Ulricehamn, Sweden Tel. +46 321 263 00 Fax +46 321 263 01 info@helge-nyberg.com www.helge-nyberg.com