

ERGOBJÖRN 708



TERMS & FUNCTIONS

With a comfortable back support, designed for towing one or several trolleys.

Ergonomy and smart functions make the truck intuitive and easy to drive. It is free from disturbing details.

HelgeNyberg

THE PRODUCER OF ERGOBJÖRN

GOOD OVERVIEW – 600 MM WIDE

The compact design provides a good overview in all directions, which increases safety.

DIFFERENT TYPES OF TOWING SOLUTIONS

Which makes it possible to tow many different types of trolleys available on the market.

WELL-THOUGHT OUT DRIVER SPACE

Wide, ergonomic and non-vibrating rubber floor. Works with presence control, where the truck can be driven only when the driver stands on the rubber platform. It also has smart compartments for storage.

EXTRA LOW IN-STEP – 70 MM

Probably the market's lowest in-step height contributes to a higher comfort.

EASY TO HANDLE AND A JOY TO DRIVE

Developed for a LEAN-environment. It is one of few trucks allowed to be driven on mezzanine floors. The compact design means a short turning radius.

ERGONOMIC CONTROLS

Ergonomy and smart functions make the truck intuitive and easy to drive. It is free from disturbing details.

FUNCTIONAL LED LIGHTS

Attractive design in combination with good function. Features that characterises a successful product.

ROBUST CONSTRUCTION

A robust and strong truck in the light-weight segment.

NO HYDRAULICS, NO LEAKAGE

The truck is a "clean machine". No leakage from oil or battery acid.

EASY BATTERY EXCHANGE – 20 SECONDS

Easy handling of battery exchange which only takes 20 seconds. Requires no specific area for charging.

STRONG ELECTRIC AC-DRIVE – INCREASED TOWING CAPACITY

Quieter, stronger and more sustainable. A 70% more powerful engine provides a prolonged running time.

Dimensions and technical data

Art No	14 16 47 08
Max. speed	12 km/h
Max. towing capacity	1500 kg, depending on speed and trolley application.
Max. gradient	10%
Length	1300 mm
Width	600 mm
Height	1360 mm
Threshold height	70 mm
Ground clearance	35 mm
Axle distance	815 mm
Weight excl. battery	320 kg

Engine	
Electrical system	24 V (AC)
Power output	1000 W

Engine type	AC, "In-wheel-drive"
Drive wheels	ø250 x 80 Polyuretan
Rear wheels	ø200 x 50 Elastic
Support wheels	ø80 x 35 Polyuretan


Batteries

Valve-regulated, maintenance-free gel batteries. No specific charging room equipment required for charging.

Voltage	Capacity	Weight
24 V	76 Ah/C5	57,6 kg
24 V	105 Ah/C5	75 kg

Examples of accessories

Flashlight, extra battery cassette, battery exchange table, computer holder, multi-purpose towing device, bluespot, iPad holder etc.

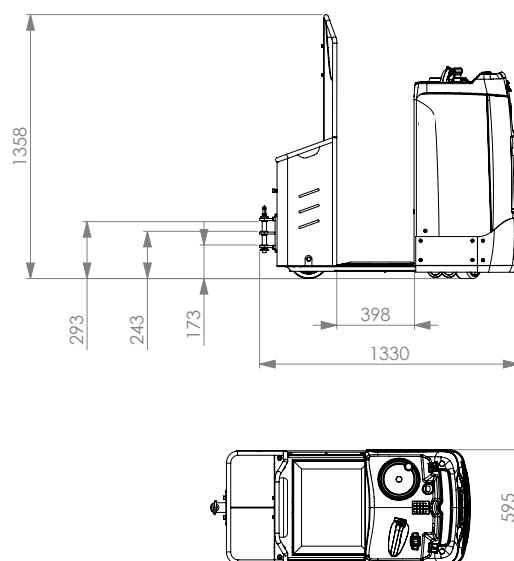

HelgeNyberg

HEAD OFFICE / SWEDEN

Industrivägen 2
SE-523 90 Ulricehamn

Phone +46 321 263 00
Fax +46 321 263 01

info@helge-nyberg.com
www.helge-nyberg.com

SALES OFFICE / GERMANY

Contact information:
www.helge-nyberg.com