

# ERGOBJÖRN 713



### ERGONOMIC CONTROLS

Ergonomy and smart functions make the truck intuitive and easy to drive. It is free from disturbing details.

### GOOD OVERVIEW

The compact design provides a good overview in all directions, which increases safety.

### WELL-THOUGHT OUT DRIVER SPACE

Wide, ergonomic and non-vibrating rubber floor. Works with presence control, where the truck can be driven only when the driver stands on the rubber platform. It also has smart compartments for storage.

### UNIQUE DOCKING SOLUTION

Provides a closeness for efficient order picking. The solution also means high flexibility when it is easy to change between different types of trolleys.

### EXTRA LOW IN-STEP – 70 MM

Probably the market's lowest in-step height contributes to a higher comfort.

### EASY TO HANDLE AND A JOY TO DRIVE

Developed for order picking. It is one of few trucks allowed to be driven on mezzanine floors. The compact design means a short turning radius.

### FUNCTIONAL LED LIGHTS

Attractive design in combination with good function. Features that characterises a successful product.

### EASY BATTERY EXCHANGE – 20 SECONDS

Easy handling of battery exchange which only takes 20 seconds. Requires no specific area for charging.

### NO HYDRAULICS, NO LEAKAGE

The truck is a "clean machine". No leakage from oil or battery acid.

### STRONG ELECTRIC AC-DRIVE – INCREASED TOWING CAPACITY

Quieter, stronger and more sustainable. A 70% more powerful engine provides a prolonged running time.



### Dimensions and technical data

<b>Art No</b>	14 16 47 13
<b>Max. speed</b>	12 km/h
<b>Max. towing capacity</b>	1000 kg depending on speed.
<b>Max. gradient</b>	10%
<b>Length</b>	1475 mm
<b>Width</b>	1315 mm
<b>Height</b>	1100 mm
<b>Threshold height</b>	70 mm
<b>Ground clearance</b>	35 mm
<b>Axle distance</b>	1050 mm
<b>Engine</b>	
<b>Electrical system</b>	24 V (AC)
<b>Power output</b>	1000 W
<b>Engine type</b>	AC, "In-wheel-drive"
<b>Drive wheels</b>	ø250 x 80 Polyurethane


<b>Rear wheels</b>	ø200 x 50 Elastic
<b>Support wheels</b>	ø80 x 35 Polyurethane

**Batteries**  
Valve-regulated, maintenance-free gel batteries. No specific charging room equipment required for charging.

Voltage	Capacity	Battery	Total weight
24 V	76 Ah/C5	57,6 kg	280 kg
24 V	105 Ah/C5	75 kg	300 kg

**Trolleys**  
Suitable for trolleys 1000-1200 mm wide.

**Examples of accessories**  
Flashlight, accessory holder, memo board, extra battery cassette, battery exchange table, waste bin, computer holder, foldable ladder, towing adapter etc.

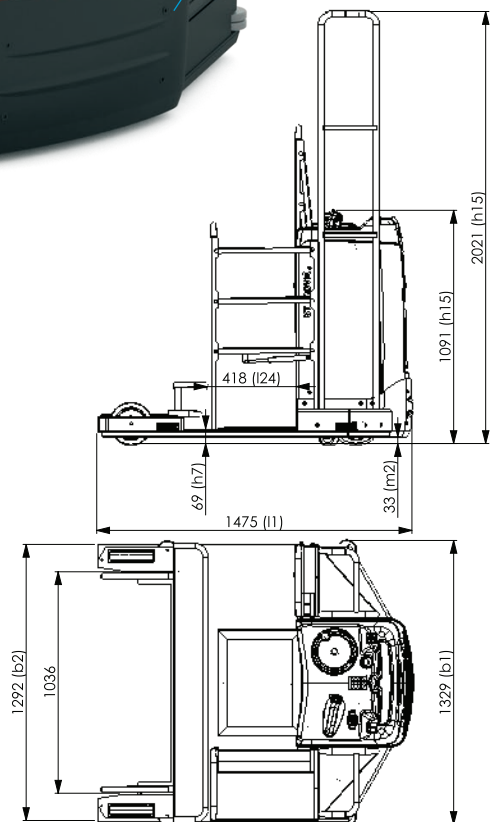

## HelgeNyberg AB

### HEAD OFFICE / SWEDEN

Industrivägen 2  
SE-523 90 Ulricehamn

Tel +46 321 263 00  
Fax +46 321 263 01

info@helge-nyberg.com  
www.helge-nyberg.com

### GERMANY

Mobil +49 160 99 143 743, +49 176 24 990 304  
Fax +46 321 263 01